

DECLARED DISTANCES				
RWY	TORA	TODA	ASDA	LDA
11	2600	2600	2600	2500
29	2600	2600	2600	2100

INTERSECTION TAKE OFF				
RWY	INTERSECTION	TORA	TODA	ASDA
29	B	1730	1730	1730
11	C	1280	1280	1280
29	C	1140	1140	1140

	SFC	Bearing strenght PCN
RWY 11	ASPH	60/F/C/X/T
RWY 29	ASPH	60/F/C/X/T
TWY A	ASPH	60/F/C/X/T
TWY B	ASPH	60/F/C/X/T
TWY C	ASPH	60/F/C/X/T
APRON	CONC	70/R/C/W/T 3)

RWY	LIGHTING 1)	
	APPROACH	RUNWAY
11	HIRL	2)
29	-	-


Aerodrome notes:

- 1) RWY LGT: edge lights: HIRL (1%, 3%, 10%, 30%, 100%) - omnidirectional, centre line: HIRL (1%, 3%, 10%, 30%, 100%) - bidirectional. Non/break backup power.
- 2) RWY 11: flashing lights system, taxiway and apron lights switch. (LOW, MEDIUM, HIGH)
- 3) STAND 1 and 7 ASPH PCN 60/F/C/X/T

Warning:

Bird concetration on and in the vicinity of RWY. Caution advised.

CHANGE: MAG VAR, THR COORD. & AD ELEV. UPDATED. CHART SYMBOLS UPDATED. AD BOUNDARY UPDATED. EDITORIAL CHANGES

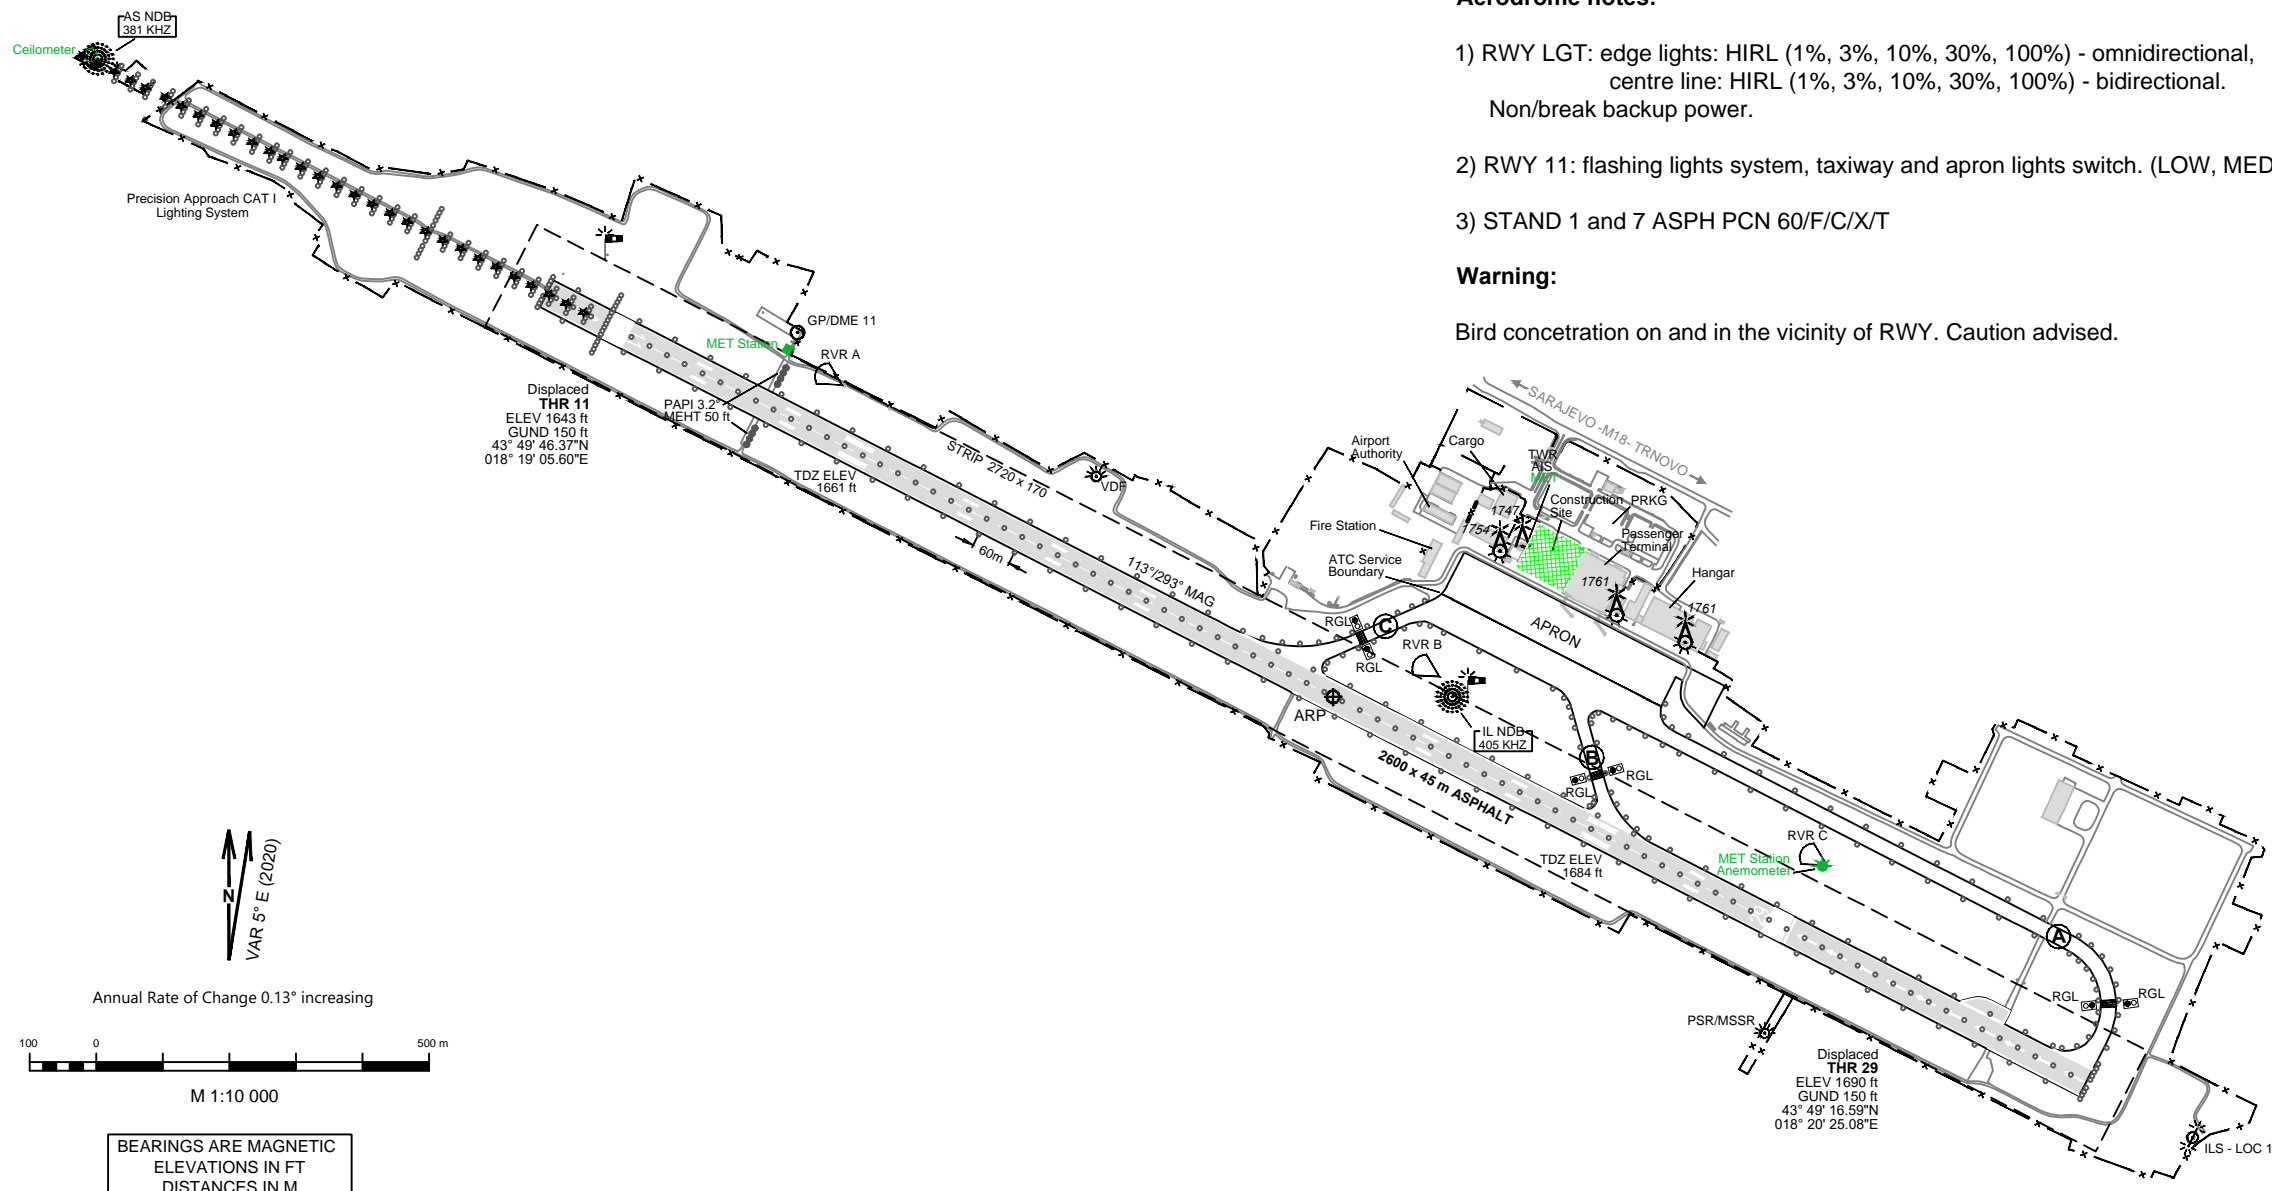

VAR 5° E (2020)
Annual Rate of Change 0.13° increasing

100 0 500 m
M 1:10 000

BEARINGS ARE MAGNETIC
ELEVATIONS IN FT
DISTANCES IN M